

**Seymour  
Duncan®**

*Congratulations on your purchase of a fine, hand-built, Seymour Duncan electric guitar pickup! Installing this pickup in your guitar isn't rocket science. And, if you're already handy with tools, it'll be a snap for you—and fun too! But if you have no experience handling red-hot soldering irons, you'd be well advised to take your new pickup and your trusty guitar to a qualified guitar tech.*

**Wiring Diagram for  
Pickup Models:**

**SLS-1** Lipstick Tube  
for Strat®


5427 hollister avenue, santa barbara, ca 93111  
tel 805.964.9610 fax 805.964.9749  
www.seymourduncan.com

**The basic steps include:**

1. Remove the old strings from your guitar.
2. Unscrew and remove the pickguard and carefully turn it over, taking care not to scratch your guitar's finish.
3. De-solder the original pickup's wires and make sure to remember where they were connected.
4. Remove the original pickup from the pickguard.
5. Put the Seymour Duncan pickup into the pickguard.
6. Tin the wires from your Seymour Duncan Pickup and then solder them into place (see Fig.1).
7. Put the pickguard back in place, taking care to tuck in loose wires.
8. Re-string your guitar and adjust the pickup height so that your new pickup balances with the other pickups in the guitar. The bridge pickup should be between 1/8" and 1/16" from the strings and the neck and middle pickups should be adjusted to achieve the best balance with the bridge pickup.

**Fig. 1**

Confused? Watch the free installation videos on the Seymour Duncan website (under "Support"). You'll see how Seymour himself does it and you'll learn lots of great tech tips.

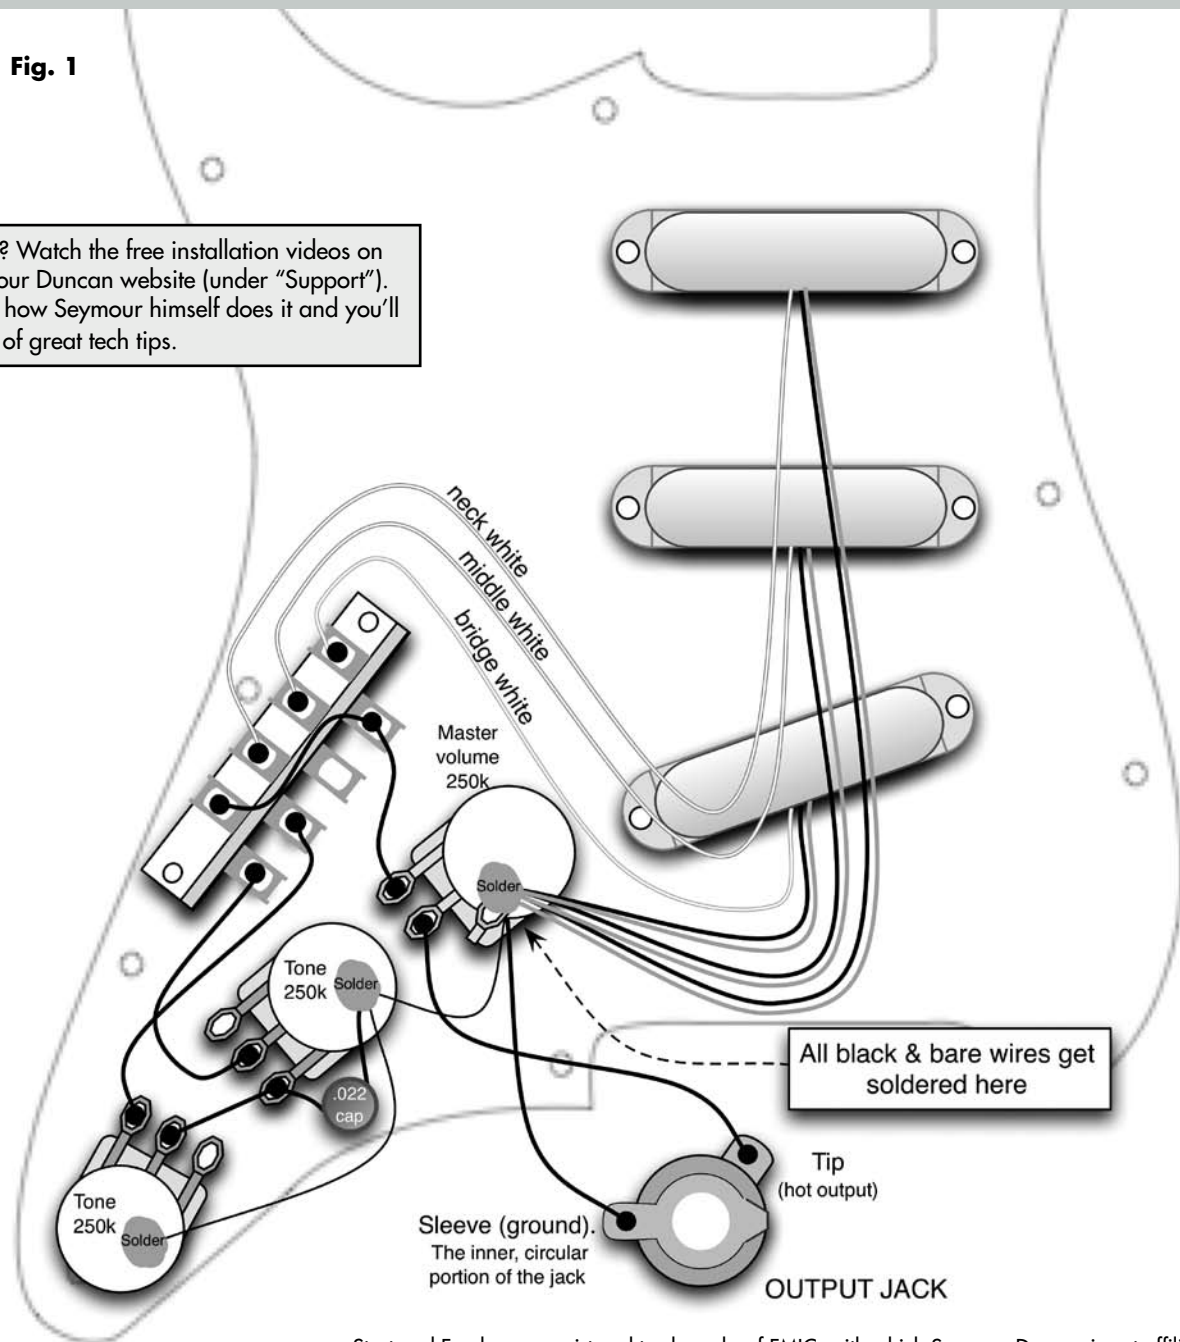



**Seymour  
Duncan®**

## Wiring Diagram for Pickup Models:


**SLD-1** Lipstick Tube for Danelectro®

5427 hollister avenue, santa barbara, ca 93111  
tel 805.964.9610 fax 805.964.9749  
www.seymourduncan.com

*Congratulations on your purchase of a fine, hand-built, Seymour Duncan electric guitar pickup! Installing this pickup in your guitar isn't rocket science. And, if you're already handy with tools, it'll be a snap for you—and fun too! But if you have no experience handling red-hot soldering irons, you'd be well advised to take your new pickup and your trusty guitar to a qualified guitar tech.*

### The basic steps include:

1. Remove the strings from your guitar.
2. Remove the control panel cover-plate from the back of the guitar.
3. De-solder the original pickup's wires from the controls and make sure to remember where they were connected.
4. Unscrew the original pickup from the back of the guitar and remove it from the guitar.
5. Put the Seymour Duncan pickup into the guitar and install the mounting screws through the back of the guitar.
6. Tin the wires from your Seymour Duncan pickup, and then solder them into place where the original pickup's wires were connected.
7. Replace the control panel cover-plate.
8. Restring your guitar and adjust the pickup height so that your new pickup balances with the other pickup in the guitar. The bridge pickup should be between 1/8" and 1/16" from the strings when they are pressed down at the highest fret on the neck. The neck pickup should be set to achieve the best balance with the bridge pickup.

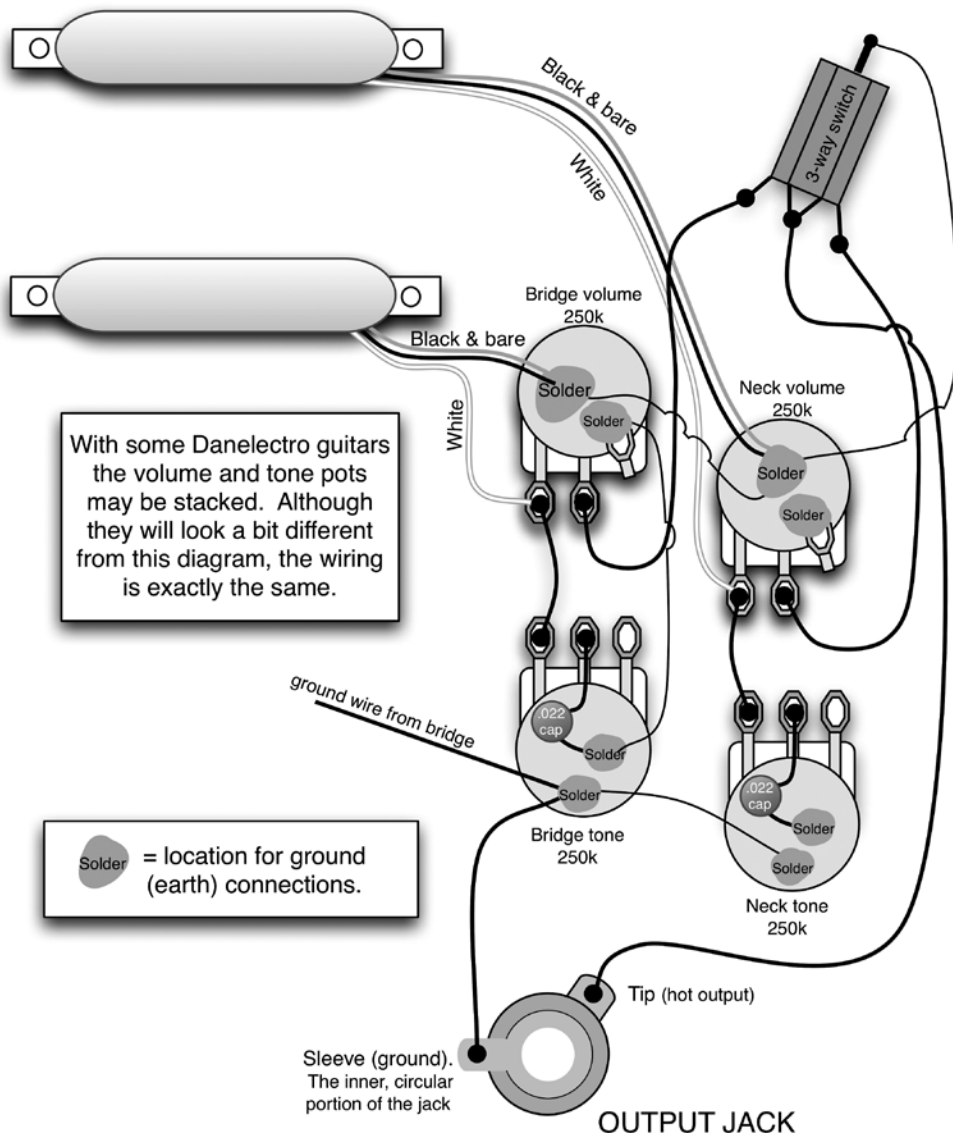

**We're not just pickups anymore. Seymour Duncan also makes super cool stomp boxes. And our sister company, D-TAR, is turning out some really hip amplification products for the serious acoustic guitarist (d-tar.com).**

Visit [seymourduncan.com](http://seymourduncan.com) for additional wiring diagrams.

P/N 501025-110 Rev. B